



SOLARONIX



SOLARONIX

Solixon A-45-CU

Based on Solaronix' exclusive light engine, our solar simulation equipment delivers a perfect and continuous artificial sunlight 24/7, allowing for accurate stability and performance assessments of solar cells at laboratory and industrial scale.

INNOVATIVE SOLUTIONS FOR SOLAR PROFESSIONALS

Solixon A-45-CU, class ABB or ABA 45 x 45 cm

The Xenonless Xenon lamp maintenance free solar simulator system and light soaker combined.

The Solixon A-45-CU is a class ABB or ABA Solar simulator intended for continuous operation (24/7).

This equipment also can work as a light soaker as it is intended for long duration operation.

This system is a complete current-voltage (I-V) measurement environment for the most demanding user.

All equipment is configured in our factory to reduce the setting costs at the customer site. The computer and software are fully installed and configured to be ready after unpacking and connecting.

The long lifetime Lumixo light engine from Solaronix generates a continuous light spectrum corresponding to a class A spectrum. This system is designed to illuminate any type of solar cell.

The Lumixo light engine is illuminating the 45 x 45cm sample area with an irradiance non-uniformity within class B and temporal stability within class B or A.

The system consists of a light engine fit into a reflector box (diffuse illuminator). A 15 mm to 200 mm wide access gap is granted between the sample area and the reflector bottom to accommodate any sample type. The illustration shows a simulator version with a small gap for thin samples.

The control software and computer is provided with the system, including data-logging of the systems parameters, such as irradiance, sample-holder temperature, etc.

The turnkey solution contains the following elements:

- **1 x Maintenance Free Solar Simulator (MFSS) - Solixon A-45-CU**
- **1 x I-V system Basic or I-V system Professional**
- **1 x I-V Tracer software**
- **2 x Solar cell probes, low resolution micromanipulator**
- **2 x Solar cell probes, high resolution micromanipulator**
- **1 x Calibrated Reference Si-solar cell**
- **1 x PC computer under Windows 7 Pro**

Solixon A-45-CU




Solixon A-45-CU - Illuminating unit specifications


Spectrum: Class A as per IEC 60904-9.

Irradiance: 700 to 1200 W/m².

Irradiance uniformity: Class B or better as per IEC 60904-9.

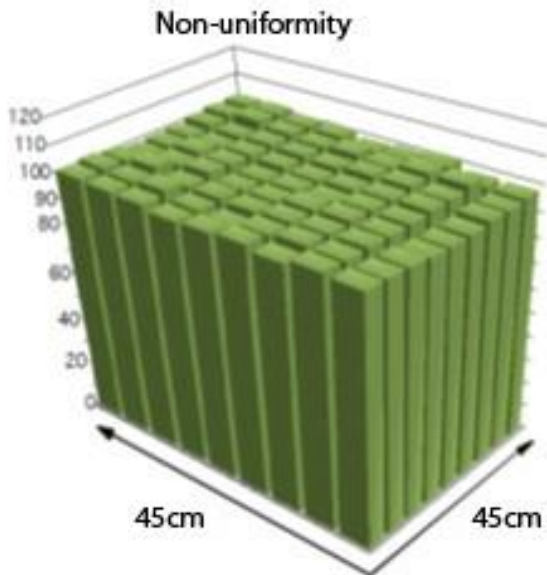

Typical light non-uniformity

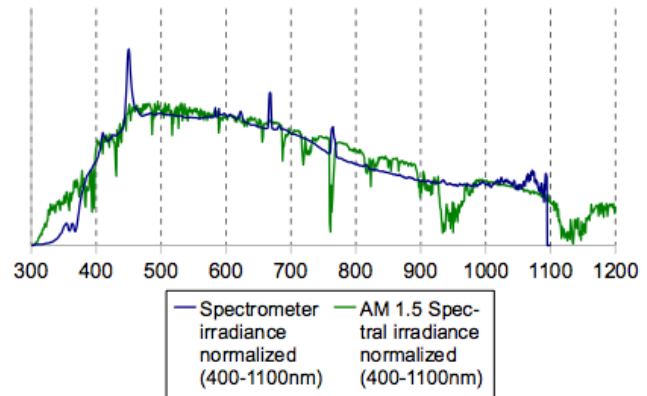

Solixon A-45-CU light emission spectrum

Class ABB or ABA specification is guaranteed in the irradiance range from 800 to 1100 W/m². Lower irradiance settings may reduce the characteristics from class ABB to BBC or ABA to BBB. Irradiance above 1100 W/m² is tolerated for a few hours, but not for a continuous operation.

Irradiance temporal stability: Class B or A (option) as per IEC 60904-9, if the room temperature stays constant.

The characteristics are measured with the illuminator loaded with black material (e.g. «Rosco» black foil), if no optical load is provided by the customer.

Solixon A-45-CU

Sample holder specifications

The sample holder contains:

- A drawer under the illuminator
- A thermostated table (sample holder) made of anodized aluminum plates having an internal water circulating system.

Tiny holes on the top surface are provided to form a vacuum chuck if connected to a vacuum pump (not supplied).

An external recirculating low-noise water chiller (air to water type) is included to provide the cooling water to the sample holder table.

The vacuum pump can be supplied by us, as option.

Cooling capacity



The thermostated sample holder can be maintained at a constant temperature (+/- 2°C) between 20°C and 55°C when loaded with a light absorbing sample and the lamp power set to 1000 W/m² irradiance.

Due to the vast variety of solar modules and encapsulation types possible, it is strongly recommended to provide us with actual samples, so finer temperature specifications may be given for the sample holder.

Absolute minimal specifications are the light-soaking test conditions as per IEC-61646: 50°C +/-10°C for a minimal illumination set to 600 W/m².

Unless otherwise agreed in the acceptance tests, the module temperature is measured with PT100 sensors attached on the back side of the module. No thermal specifications can be given for a margin of 3 cm inwards to the panel rim, neither on the junction box area.

Detailed mechanical drawings of the test modules, or a representative sample, must be provided by the customer before order confirmation to ensure best equipment fitness.

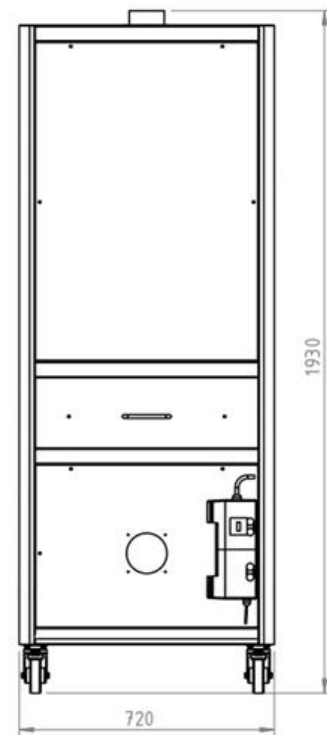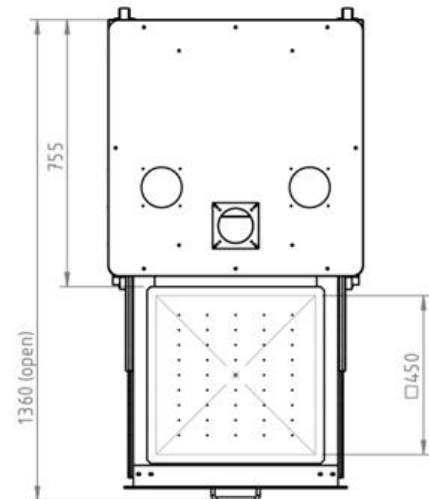

- Weight: ~180 kg
- Recirculating chiller: 65 kg
- Recirculating chiller size:
W 460 x D 610 x H 490 mm
(does not fit inside the unit)
- Ambient cooling requirement: air cooled 600 cubic meter/hour from ambient at 25°C
- Power requirement:
3P + N 380-400 VAC 50-60 Hz
- Max. 5.6 kW, nominal 3.1 kW

Light engine

The light engine is a Xenonless Xenon lamp system. **The light engine is based on plasma lamp. This lamp equips the new generation of maintenance free solar simulator.**

The advantages of plasma lamp are:

- Sun spectrum class A according IEC60904-9 without filter
 - o Reduce maintenance cost
- Life time up to 40'000 hours (warranty 20'000 hours)
 - o Reduce maintenance cost
- No shift spectrum
 - o Increase quality test
- No light flux reduction
 - o Increase quality test

Documentation

Comprehensive documentation is provided with the system, including operation manual, software manual, and the necessary electrical and mechanical schematics for maintenance.

Safety

No particular safety means are necessary for system operation. Direct view to the light source is prevented by the system design. UV protection glass is provided with the system.

I-V System Basic

Our I-V System Basic is built around the well-known Keithley 2401 Source meter. This proven instrument has all it takes to measure I-V curves (both dark and illuminated) on solar cells. The available current range has a minimum of 10 pA and a maximum of 1A, where the voltage ranges from 1 μ V to 20V. Unlike the more expensive Keithley sourcemeters that interface by USB, this instrument can only be controlled by a GPIB interface. In our basic I-V System we include a GPIB/USB interface for computer connection of the sourcemeter.

When measuring solar cells, it is very important to use a thermostated sample holder, to avoid measurement due to thermal drift of the sample.

Another important parameter for solar cell metrology is the temperature. A high precision, class A Pt100 temperature sensor including computer interface (USB) is provided with this basic IV-System.

Please note that the Tracer I-V Curve Software is required to operate the I-V System Basic.

Key features

- Instrument for measuring I-V curves (both dark and illuminated)
- Current range min. 10pA and max. of 1A
- Voltage range 1 μ V to 20V
- Including GPIB interface
- Including class A Pt100 temperature sensor with USB computer interface

I-V System professional

Our I-V System Pro is built around the well-known Kepco Bop bi-polar power supply and 3 Agilent DMMs to realize high quality data acquisition on current, voltage and reference cell. These proven instruments have all it takes to measure IV-curves (both dark and illuminated) on solar cells and modules.

The current range is $\pm 4A$, where the voltage range is $\pm 100V$. Other ranges are available on request.

When measuring solar cells, it is very important to use a thermostated sample holder, to avoid measurement due to thermal drift of the sample.

Another important parameter for solar cell metrology is the temperature. A high precision, class A Pt100 temperature sensor including computer interface (USB) is included with this professional I-V System.

Please note that the Tracer I-V Curve Software is required to operate the I-V System professional.

Key features

- Kepco Bop bi-polar power supply (electronic load)
- 3 x Agilent digital multi-meter (DMM)
- Instrument for measuring I-V curves (both dark and illuminated)
- Current $\pm 1A$ (other ranges are available on request.)
- Voltage range $\pm 100V$ (other ranges are available on request)
- Including GPIB interface
- Including class A Pt100 temperature sensor with USB computer interface



I-V System professional

I-V Measurement Software

A powerful software named Tracer, controlling the electronic load, allows a user-friendly operation, going from simple current-voltage (I-V) plot tracing to more advanced device characterization.

It seems logical for this measurement to use a standard power supply, because a power supply is normally used to provide a variable voltage and current. Unfortunately, this would not work for solar cells. A solar cell generates current, so you will need to have a power supply that sinks this generated current instead of provide it. This can be done with a so called bi-polar power supply (or electronic load). This is a power supply that can sink and source current at both positive and negative voltages. There are many instruments on the market that can be used a such a bi-polar power supply. Some of them are just bi-polar power supplies while others integrate measurement and control capabilities as well.


Tracer will let you define and setup a system based on different instruments to measure your I-V curves. You can add multiplexers to automatically measure multiple cells by using one single measurement system, implement contact checking and measure monitoring solar cells.

Some examples of the supported hardware:


- Keithley 2400 series
- Keithley 2600 series
- HACKL Electronic Loads
- Kepco BOB
- B&K Electronic Loads
- Toellner loads info
- EKO MP-180 Curve Tracer
- National Instruments Data Acquisition
- MODBUS / Ethernet controlled instruments

Of course Tracer natively supports the control of all Keithley 2400 and 2600 series SourceMeters. These instruments have proven their strength over time for the measurement of solar cells. They range from 0.1fA – 20 Amperes. Tracer is developed with the latest Microsoft.NET Technology, which resulted in a modern 'Microsoft Office' look and feel. A stable operation on the Microsoft Windows platform is guaranteed (Vista or higher). Other popular platforms like Linux and MacOS will be supported in the future.

I-V Software main window

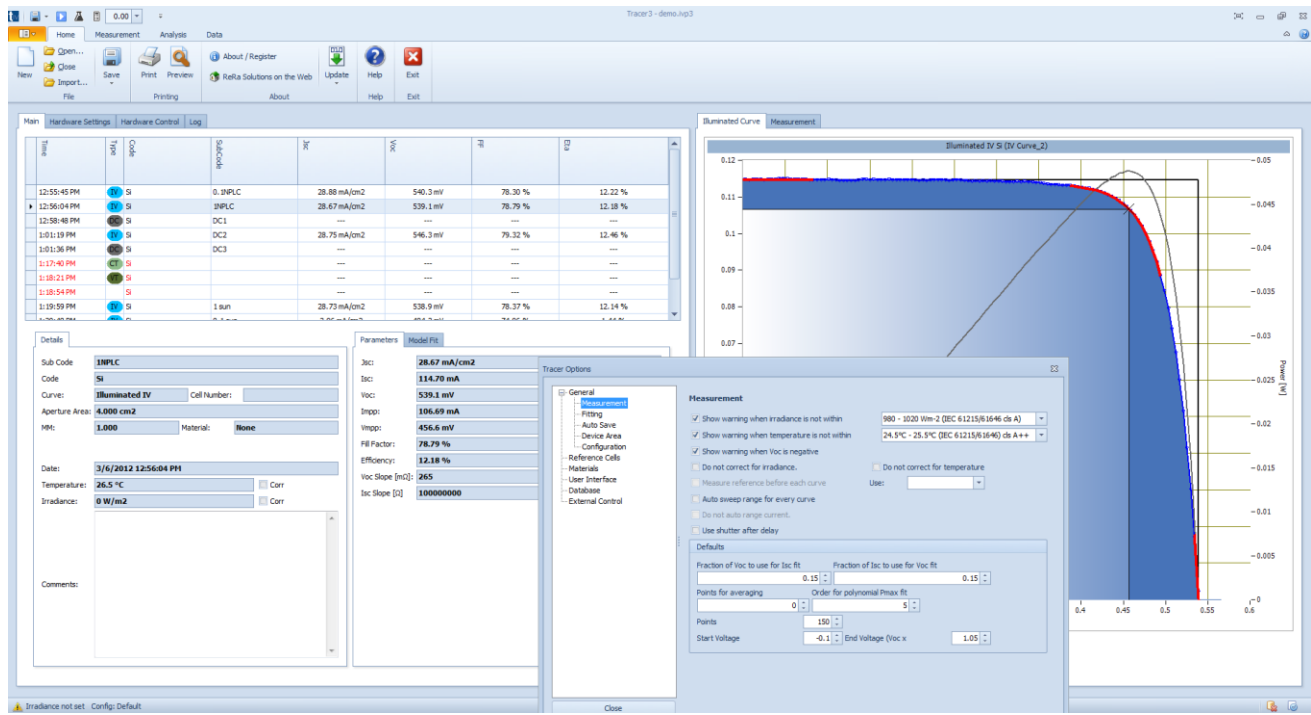

Definition of material tested

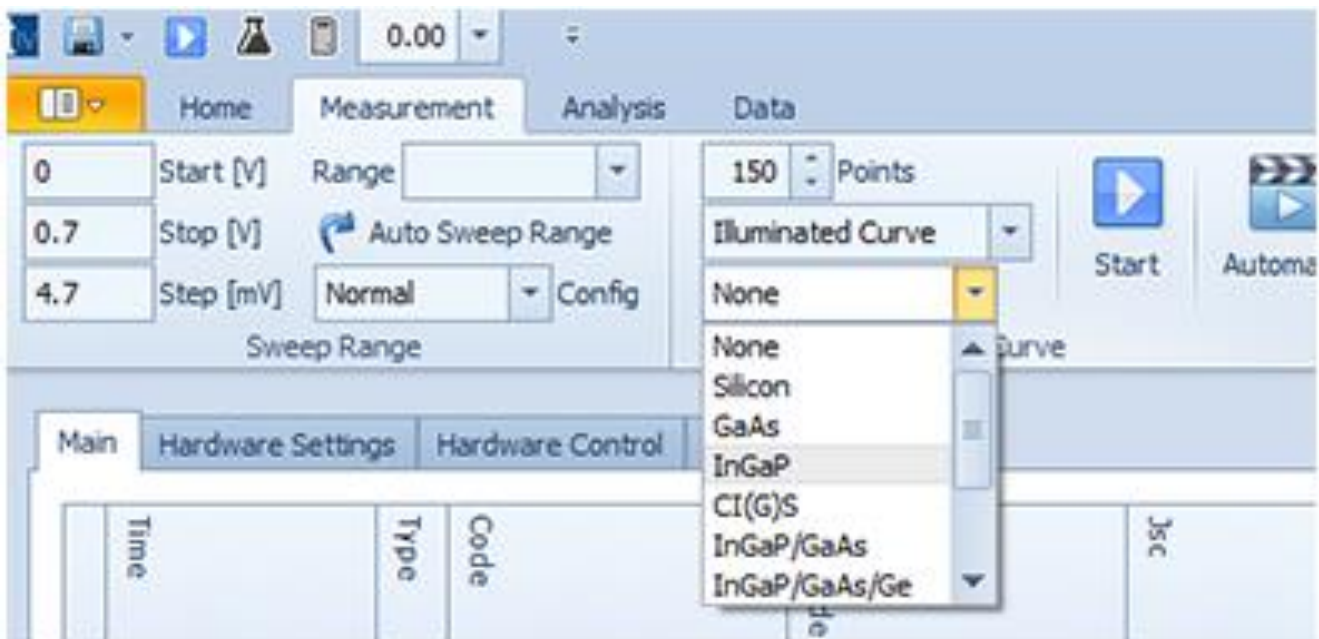

Tracer Configurator

Before you start working with Tracer, you will have to configure your system. This is done by the Tracer Configurator. A tool that completely defines the setup you want to use. Tracer intends to support most instruments available on the market to use as an IV-curve measurement system. You can use for example a Kepco BOP bipolar power supply, add 2 Agilent 34410A DMMs to measure voltage and current, use a National Instruments DAQ card to control the Kepco BOP and get that unused Keithley 2000 DMM to measure a Pt100 sensor for the solar cell temperature. This is all defined in the configurator.

The screenshot shows the 'Tracer 3 Hardware Setup' window with the following configuration details:

- IV Curve Tracing**
 - To perform curve tracing: Keithley 2400
 - To measure IV curve voltages: (empty dropdown)
 - To measure IV curve currents: (empty dropdown)
 - To start measurements by switch: (empty dropdown)
- IO Control / Relays**
 - To control the shutter: ReRa RR-3099 Shutter Controller
 - To indicate measurement active: (empty dropdown)
 - To control multiplexing: Multiplexer 64 Channels
- Contact Checking**
 - To enable 4-wire contact check: (empty dropdown)
 - Measure Resistance: (empty dropdown)
- Irradiance Measurement**
 - To measure irradiance: Keithley 2400
 - To measure monitor cell: Agilent 34410A DMM
- Temperature**
 - To measure DUT Temperature: EKO MP-180 I-V Curve Tracer
 - To measure reference cell temperature: Agilent 34410A DMM
 - To control DUT temperature: (empty dropdown)

Buttons at the bottom: Reset, Close, < Back, Next >, Cancel.

Solar cell probes

The High Resolution Solar Cell Probe is a precise probing unit enabling accurate current/voltage measurements on solar cells.

The High Resolution Probe is designed primarily for probing targets of approximately at least 13 microns in size at a 80 TPI resolution (320 μm per 360° turn). It is available with a magnetic base in either left or right hand models.

The 125 mm x 125 mm scanning area allows positioning on a broad range of solar cell materials. Each axis is spring loaded to prevent backlash, and the control knobs are conveniently placed at the rear of the micro-positioner to allow one hand control over three axes at the same time. The probe mount is electrically isolated from positioner body.


Optional: 4-wire Kelvin Configuration

The High resolution Solar Probe can be used in a true 4-wire Kelvin configuration. This means that the possible voltage drop over the current wire is eliminated by measuring the voltage at the sample directly. The wires are electrically isolated from the body. To measure a solar cell in 4-wire Kelvin configuration a second Solar Cell Probe or a base plate with voltage sense is required.


Key Features

- Dedicated probing unit to enable high quality current/voltage measurements on solar cells
- High precision positioning
- Suitable for a broad range of solar cells
- 13 μm target
- Left-handed or right-handed models
- Suitable for substrate and superstrate measurements
- Standard configuration: incl. Tungsten probe, 25 μm tip, 25mil shank
- Spring tip holder is very robust and accepts any of the available probe tips with shank diameters ranging in diameter from 10 to 25 mils.
- No special tools are required for loading and unloading the tip from the holder.
- 45° angle
- Including solid case

Standard: tungsten spring probe

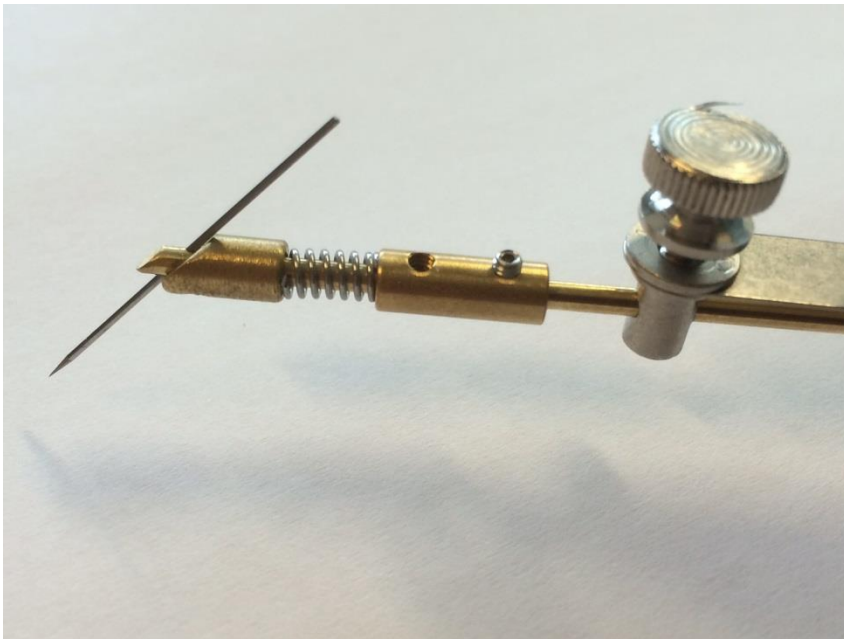


Optional: 2-pin BeCu probe tip (required for 4 point measurements)

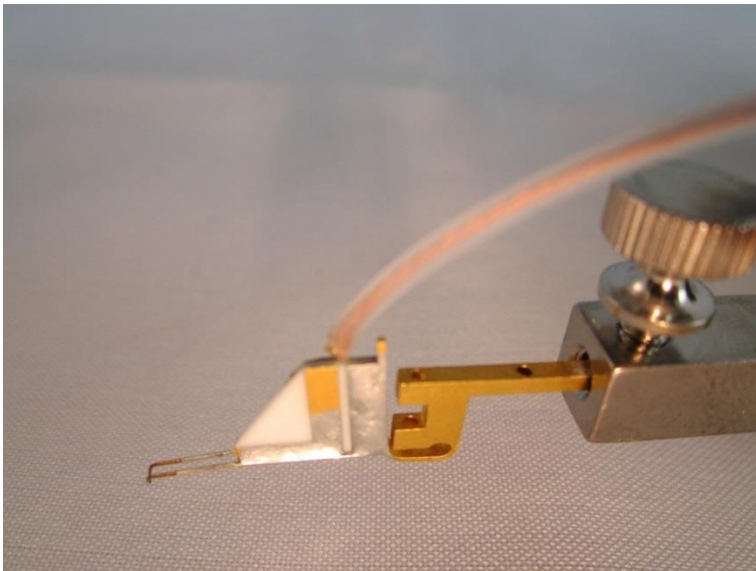

Models

- Probe Tungsten, right handed
- Probe Tungsten, left handed
- 2-pin BeCu probe tip, right handed
- 2-pin BeCu probe tip, left handed

Reference Si solar cell

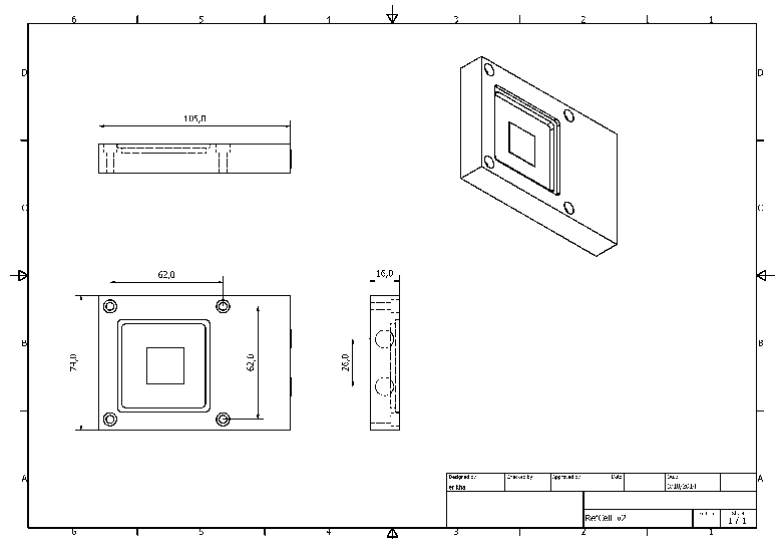

The reference Si cell has active area of 2 x 2 cm

The reference has a dimension of 74 x 105 x 16 mm

Product Description

The standard crystalline silicon reference cell manufactured by ReRa is a high-quality precision sensor for the determination of solar simulator irradiance levels. ReRa uses the Radboud University Nijmegen PV Measurement Facility to calibrate the cells indoor. The calibration is done against an established set of reference cells calibrated at NREL and Fraunhofer ISE. These references are measured each year at the spectroradiometer and broadband intercomparison to ensure traceability.

Key features

- Lower cost reference cell
- Calibrated against traceable reference set
- Irradiance and temperature readout
- Protective Quartz (standard) or Schott KG glass window
- Compatible with the Tracer I-V software
- Open and shunted version available
- Several filter options (KG# window) to match spectral response, KG number to be specified at order.
- Including full calibration report (I-V curve plot, I_{sc} , V_{oc} , I_{mpp} , V_{mpp} , Fill Factor and Efficiency)
- Including cables to connect reference cell in a 4 wires configuration
- Including protective suitcase

Models

- Shunted Silicon Reference Cell
- Open Silicon Reference Cell


Options

All reference cells can be ordered with a KG3 or KG5 window for measurements of specific cell materials.

- KG3 window (+ € 125)
- KG5 window (+ € 125)



SOLARONIX

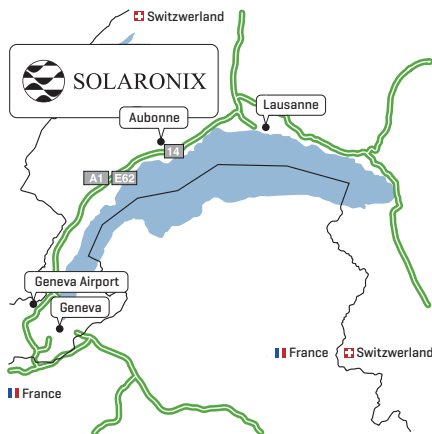

Solaronix SA

Rue de l'Ouriette 129 T +41 21 821 22 80
CH-1170 Aubonne F +41 21 821 22 89
Switzerland info@solaronix.com

www.solaronix.com